

P Series touch panel

(Single-zone series)



Technical Specs:



P1: Dim Panel

- Input Voltage: DC12V-24V
- Load Current: 4A×4CH Max 16A
- Grey Scale Level: 4096×4
- Dimming Range: 5%-100%
- Max Output Power: 192W/384W(12V/24V)
- Working Temperature: -20°C-55°C
- Dimensions: L86×W86×H36(mm)
- Weight(N.W.): 190g



P2: CCT Panel

- Input Voltage: DC12V-24V
- Load Current: 4A×4CH Max 16A
- Grey Scale Level: 4096×4
- Max Output Power: 192W/384W(12V/24V)
- Working Temperature: -20°C-55°C
- Dimensions: L86×W86×H36(mm)
- Weight(N.W.): 190g



P3: RGB Panel

- Input Voltage: DC12V-24V
- Load Current: 4A×3CH Max 12A
- Grey Scale Level: 4096×3
- Max Output Power: 144W/288W(12V/24V)
- Working Temperature: -20°C-55°C
- Dimensions: L86×W86×H36(mm)
- Weight(N.W.): 190g



P4: RGBW Panel


- Input Voltage: DC12V-24V
- Load Current: 4A×4CH Max 16A
- Grey Scale Level: 4096×4
- Max Output Power: 192W/384W(12V/24V)
- Working Temperature: -20°C-55°C
- Dimensions: L86×W86×H36(mm)
- Weight(N.W.): 190g

— 1 —

- ※ Long press to turn on/off the buzzer.
- ※ Hold the , keys for 2 second, the controller will restore default and restart automatically.
- ※ P3 and P4, short press , key under static to adjustable brightness.
- ※ short press , key under dynamic to adjustable speed, long press the brightness.
- ※ RGB & RGBW MODE:


NO.	MODE	NO.	MODE
1	RGB CHANGE	2	COLOR CHANGE
3	WHITE FLASH	4	RGB FADE
5	COLOR FADE	6	RC FADE
7	RB FADE	8	GB FADE
9	WHITE FADE	10	ALL MODE CYCLE

Green Block:

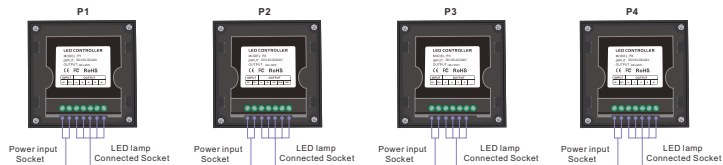



Wiring Diagram:

P1 Wiring Diagram:

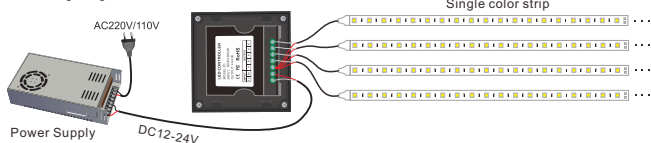


— 3 —

Installation:

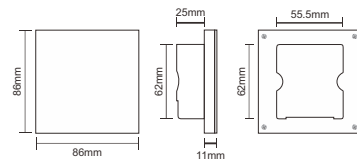


Key Functions:


P1: Dim Panel




P2: CCT Panel



P3: RGB Panel




P4: RGBW Panel




— 2 —


P2 Wiring Diagram:

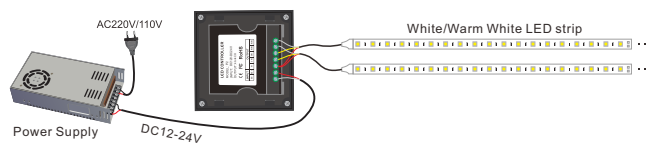

P3 Wiring Diagram:

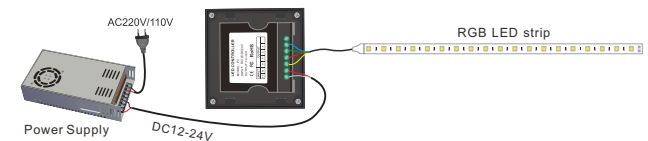

P4 Wiring Diagram:

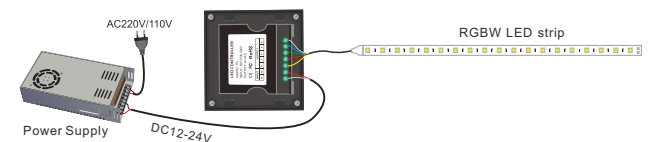

— 4 —