



■ Features

AC Input range selectable by switch
 Withstand 300VAC surge input for 5 seconds
 No load power consumption<0.75W
 Miniature size and 1U low profile
 High operating temperature up to 70 ℃
 Fanless design,no noisy
 Protections: Short circuit / Overload / Over voltage / Over temperature
 IEC/EN61558-1, 2-16 for household appliances
 Operating altitude up to 5000 meters
 Withstand 5G vibration test
 High efficiency, long life and high reliability LED indicator for power on
 100% full load burn-in test
 2 years warranty


■ Applications

Industrial automation machinery and Industrial control system
 Mechanical and electrical equipment
 Electronic instruments, equipments or Apparatus Household appliances,
 LED lighting ,strip,led bar etc.

■ Description

DCV-300 series is a 300W single-output enclosed type power supply with 21mm of low profile design. Adopting the input of 200VAC or 240VAC, the entire series provides an output voltage line of 12V and 24V.
 In addition to the high efficiency up to 90%, the design of metallic mesh case enhances the heat dissipation of DCV-300 that the whole series operates from - 30 ℃ through 70 ℃ under air convection with a fan.
 Delivering an extremely low no load power consumption (less than 0.75W), it allows the end system to easily meet the worldwide energy requirement. DCV-300 has the complete protection functions and 5G anti-vibration capability;
 It is complied with the international safety regulations such as EN60335-1,EN61558-1/-2-16 and GB4943. DFV-300 series serves as a high price-to-performance power supply solution for various industrial applications.


■ Model Encoding




SPECIFICATION

MODEL	DCV-300-12	DCV-300-24			
OUTPUT	DC VOLTAGE	12V	24V		
	RATED CURRENT	25.0A	12.5A		
	CURRENT RANGE	0 ~ 25.0A	0 ~ 12.5A		
	RATED POWER	300W	300W		
	RIPPLE & NOISE (max.) Note.2	200mVp-p	200mVp-p		
	VOLTAGE ADJ. RANGE	10.2 ~ 13.8V	21.6 ~ 28.8V		
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%		
	LINE REGULATION	±0.5%	±0.5%		
	LOAD REGULATION Note.5	±0.5%	±0.5%		
	SETUP, RISE TIME	500ms, 30ms/230VAC	500ms,30ms/115VAC at full load		
HOLD UP TIME (Typ.)	16ms/230VAC	12ms/115VAC at full load			
INPUT	VOLTAGE RANGE	85 ~ 132VAC / 170 ~ 264VAC by switch	240 ~ 370VDC (switch on 230VAC)		
	FREQUENCY RANGE	47 ~ 63Hz			
	EFFICIENCY (Typ.)	87.5%	89.0%		
	AC CURRENT (Typ.)	4.0A/115VAC	2.2A/230VAC		
	INRUSH CURRENT (Typ.)	COLD STAR 60A/230VAC			
	LEAKAGE CURRENT	<2.0mA / 240VAC			
PROTECTION	OVER LOAD	110 ~ 140% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed			
	OVER VOLTAGE	13.8 ~ 16.2V	28.8 ~ 33.6V		
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover Protection type : Shut down o/p voltage, re-power on to recover			
ENVIRONMENT	WORKING TEMP.	-30 ~ +70℃ (Refer to "Derating Curve")			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH			
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)			
SAFETY &	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes			
	SAFETY STANDARDS	EN60335-1, EN61558-1 /-2-16, CCC GB4943 approved			
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2 KVAC O/P-FG:1.25 KVAC			
EMC (Note 7)	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH			
	EMC EMISSION	Compliance to EN55022 (CISPR22), GB9254 Class B, EN55014, EN61000-3-2Class A(≤75% Load), EN61000-3-3			
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 (EN50082-2), heavy industry level			
OTHERS	MTBF	601K hrs min. MIL-HDBK-217F (25℃)			
	DIMENSION	339*53*21mm (L*W*H)			
	PACKING	0.4Kg / 60pcs/24.5Kg/ 36*32*27.8 CM			
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Line regulation is measured from low line to high line at rated load.</p> <p>5. Load regulation is measured from 0% to 100% rated load.</p> <p>6. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time.</p> <p>7. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC direc ves. For guidance on how to perform these EMC tests, please refer to EMI tes ng of component power supplies.</p> <p>8. The ambient temperature derating of 5℃/1000m is needed for operating altitude greater than 2000m (6500ft).</p>				


■ Block Diagram

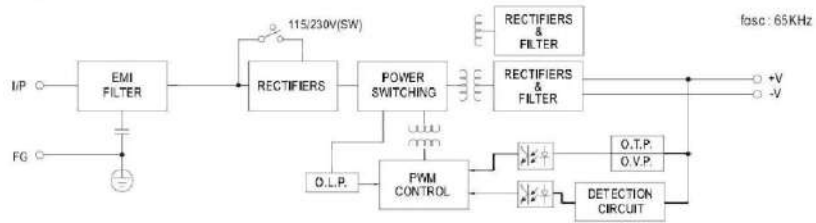

■ Derating Curve

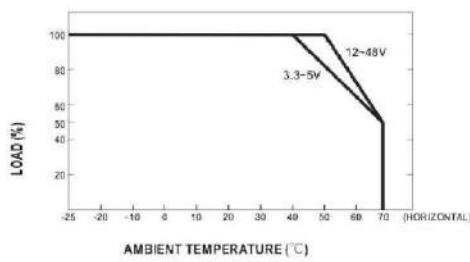

■ Static Characteristics

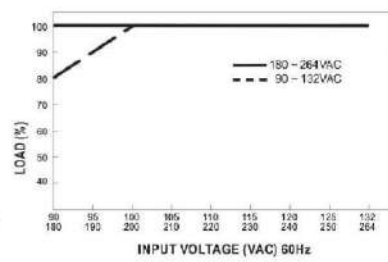

■ Mechanical Specification

Unit:mm

