

# EMC Approved Slim Waterproof LED Power Supply



## Features:

1. Constant voltage design (Constant Voltage Mode)
2. Universal AC input
3. Sealed inside with plastic irrigation. Conform with IP67 rating
4. Withstand 300VAC surge input for 5 seconds
5. Built-in Protections: Short circuit/Overload
6. Cooling by free air convection
7. 100% full load burn-in test
8. High performance


This certification icon is in progress, and the final product shall prevail

CE CB  FC  RoHS SELV   IP67


<b>Model No.:</b>		<b>PV-12400S</b>
<b>Output</b>	Rated Output Voltage	12V
	Output current Range	0-33.3A
	Rated Output Power	400W
	Output Voltage Precision	±3%
	Output Ripple and Noise	< 240mVP-P
	Load Regulation	±2%
	Start/Rise Time	<1000ms/230VAC
	Retention Time	20ms/230VAC
<b>Input</b>	Input Voltage Range	170-264VAC
	Input Frequency Range	50-60HZ
	Power Efficiency	>88%
	Leak Current	< 0.7mA/230VAC
<b>Protection</b>	Overload Protection	When the load current exceeds 110-140% of the output current, the power supply will enter protection state. Protection Mode: Hiccup Mode.
	Short Circuit Protection	Protection mode: hiccup mode. When the short-circuit fault is removed, the power supply will automatically resume work.
<b>Working Environment Protection</b>	Working Temperature	-40°C~70°C (Pls refer to "Derating Curve")
	Storage Temperature	-40°C~80°C
	Ingress Protection Rating	90%RH non condensing, refer to IP67
	Shockproof Character	10-500HZ,2G 10min/1cycle,preiod for 60min,each along X,Y,Z axes
	Temperature Coefficient	±0.03%°C (0-50°C)
<b>Security Features</b>	Security Standard	IEC 61347-2-13 2014+A1 IEC 61347-1 2015+A1
	Withstand Voltage	I/P-O/P:3.75KVAC,I/P-FG:2KVAC,O/P-FG:1.5KVAC
	Insulation Resistance	I/P-O/P:>100M Ohms/500VDC/25°C/70% RH
<b>Others</b>	Wires	Input: 《VDE》 H03VV-F 300/500V 3x1.5mm <sup>2</sup> L=300mm Output: 《VDE》 H05RR-F 300/500V 2x2.5mm <sup>2</sup> x2 L=300mm
	Outter Size	294*80*31mm(L*W*H)
	Weight/PCS	1400g

# EMC Approved Slim Waterproof LED Power Supply


## Outer Size (mm):

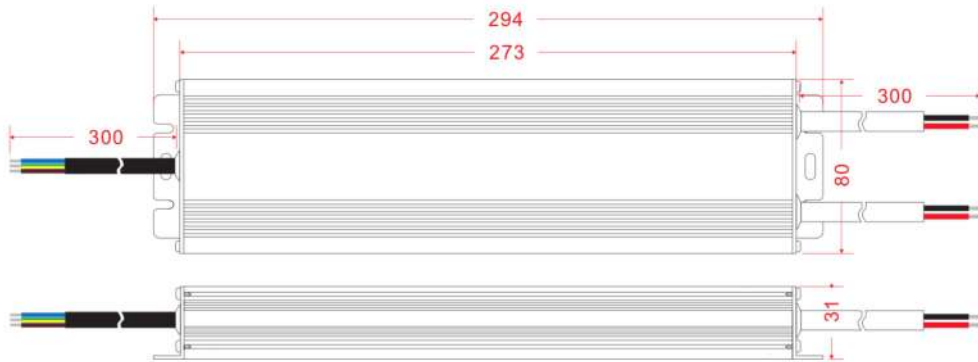

## Wiring Diagram:

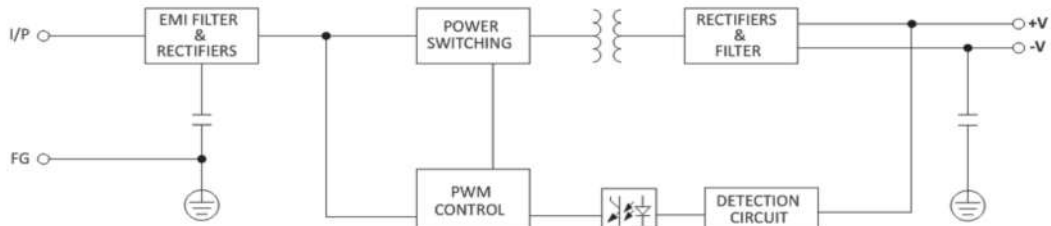

## Graph:

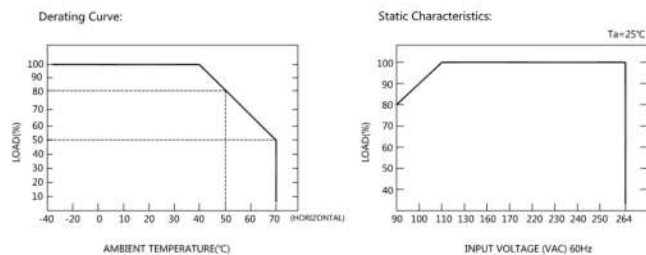

## Packaging Specification:

1. Unit Packing: 10PCS/CTN
2. Carton size: 32.5\*21.5\*21cm
3. G.W./CTN: 15KG

## Note:

1. Load short circuit and overload will cause power protection and cause the power supply to not work normally.
2. The connection line between the power supply and the load should be as short as possible. Too long or too thin connection line will cause voltage drop on the line, and too thin connection line will easily cause hidden dangers in safety.
3. Please install the power supply in a well-ventilated place to ensure good ventilation and heat dissipation of the power supply.
4. Live wiring is prohibited. After checking and confirming that the wiring is correct, check that there is no short circuit, and then